


TECHNICAL INFORMATION  
SWARCOPLAST KSP 230 HighLine

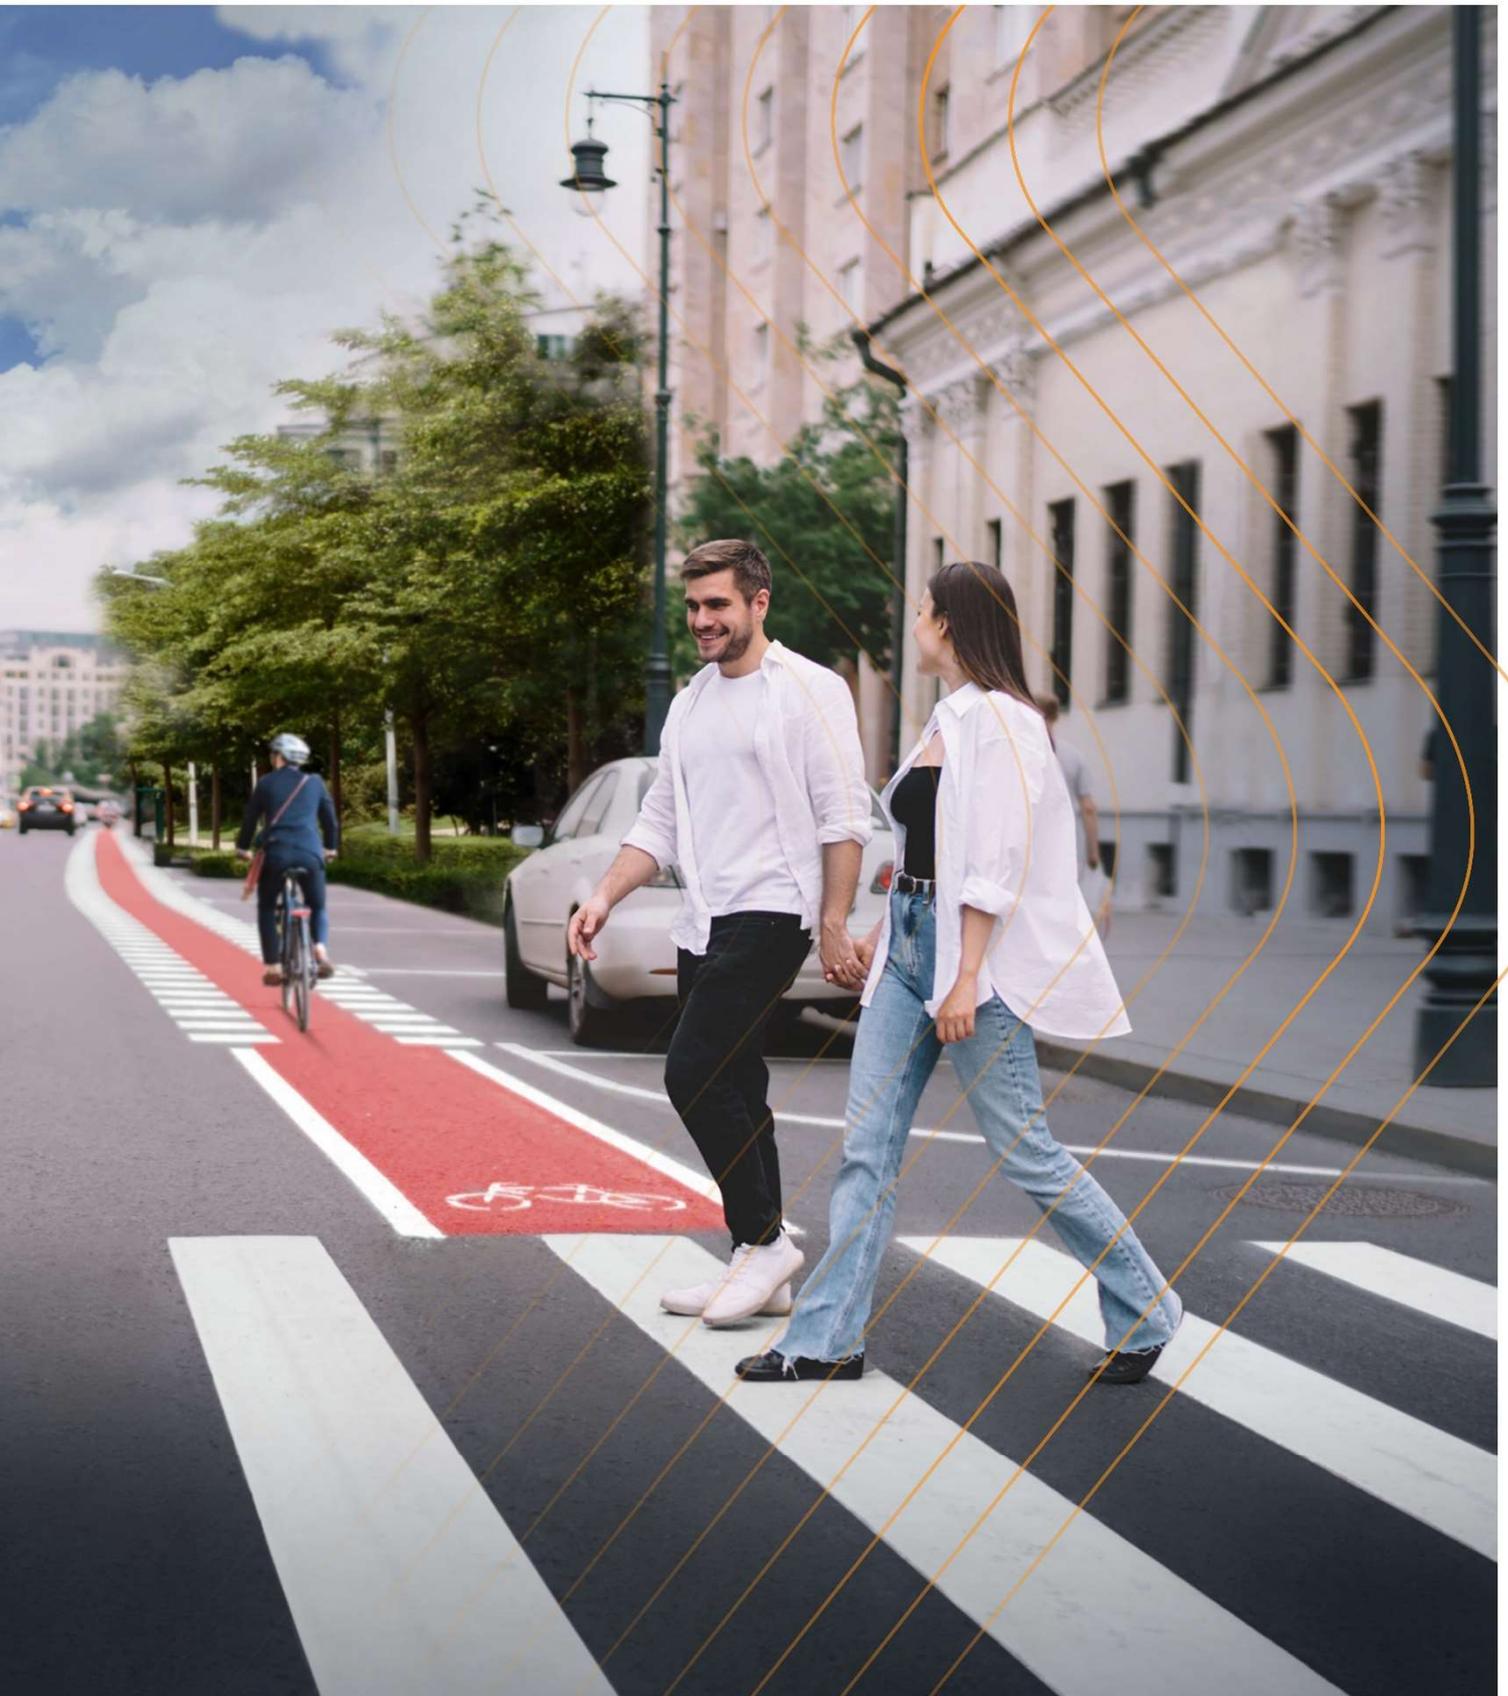

# SWARCOPLAST KSP 230 HighLine

Art.-No.: 5184R (reactive component)  
5184RW (reactive component, winter formulation)

Version: 2026-02-24

<b>1</b>	<b>Main characteristics / Fields of applications .....</b>	<b>3</b>
<b>2</b>	<b>Technical Data .....</b>	<b>3</b>
<b>3</b>	<b>Mixture ratios / Application techniques / Hardener .....</b>	<b>4</b>
<b>4</b>	<b>Processing Instructions.....</b>	<b>4</b>
4.1	Preparation of material and application techniques .....	4
4.2	Optimizing of application properties of cold spray plastic .....	5
4.2.1	General Information .....	5
4.2.2	Viscosity.....	5
4.2.3	Reactivity / curing time .....	5
<b>5</b>	<b>Road surface / pretreatment.....</b>	<b>6</b>
5.1	General Information .....	6
5.2	Concrete or cement-bound surfaces .....	6
5.3	Bituminous surfaces .....	7
5.4	Cobbled pavement .....	7
5.5	Floor coatings .....	7
<b>6</b>	<b>Application techniques .....</b>	<b>7</b>
<b>7</b>	<b>Test reports / Field test reports.....</b>	<b>8</b>
7.1	Table 1: RPA – test reports by BASt (German Road Institute) .....	8

## Important Information:

Please consider our General Terms and Conditions and the general notes of the Technical Information Sheet! No liability is accepted for any errors! The information is provided to our best knowledge and experience. This information is, however, no warranty for any properties of the material. We provide this information without obligation, also regarding the rights of third parties. The user has to make sure that the material is appropriate for the respective application.

# 1 Main characteristics / Fields of applications

## SWARCOPLAST KSP 230 HighLine...

- is designed for maximum performance by combining the best raw materials
- is used as a Type II marking with high-quality, BaO-free SWARCO SOLIDPLUS NEXT retroreflective materials and the associated exceptionally high night visibility values, making it very well suited for accident black spots
- belongs to the group of environmentally sound, solvent-free, sprayable multi-component reactive systems
- consists of two or more components that chemically react with each other
- is suitable for all bituminous (e. g. mastic asphalt, asphaltic concrete) and concrete surfaces
- is appropriate for universal use with all common application techniques for cold spray plastics (e. g. system 98:2, system 1:1)
- is applied using the conventional spray technique or injection method and is gritted exclusively with high-quality drop-on materials
- is generally made in airless quality

## 2 Technical Data

<b>Color</b>	White, (other colors upon request)
<b>Density</b>	approx. 1.58 kg/l +/- 0.06
<b>Potlife</b>	min. 2-5 min. (depending on the added amount of hardener, the air- and material temperature)
<b>Overrollability / curing time</b>	Depends on the climatic conditions (see tables under point 4.2.3). In general the markings' overrollability must be checked before exposing them to traffic impact.
<b>Solvent content</b>	Solvent-free
<b>Solvent for cleaning</b>	Special cleaner for marking machines Art.-No.: 3086
<b>Storage stability</b>	6 months (unmixed), in sealed original packaging; protect from frost and direct sun light
<b>Standard packaging</b>	<p><b>2-C KSP 230 HighLine:</b> Tin container of 16/25/40 kg filling weight. Larger container upon request Other tin container / filling weights on request</p> <p><b>3-C KSP 230 HighLine:</b> white container – 40 kg filling weight – non-reactive component silver container – 40 kg filling weight – reactive component larger container for reactive/non-reactive component upon request</p> <p><b>Hardener powder:</b> PE- bags, filling weight corresponds to cold spray plastic quantity and mixture ratio</p> <p><b>Liquid hardener:</b> Plastic cans – 20 kg filling weight</p> <p><b>Attention:</b> all hardener types are organic peroxides - they must be separately packaged, transported and stored from the cold spray plastics in special containers (special cartons and boxes).</p> <p><b>Drop-on material:</b> paper bags with PE inlay – 25 kg filling weight</p>
<b>Identification</b>	The regulations and instructions concerning appropriate transport, handling, storage, first aid and measures, toxicology and ecology are stated in detail in our material safety data sheets! The instructions stated on the product label and in the MSDS must be followed.
<b>Processing temperature</b>	min. +5°C
<b>Surface temperature</b>	+5°C to +45°C
<b>Rel. humidity</b>	max. 75% (dew point spreadsheet has to be regarded)
<b>Layer thickness</b>	0.3 – 1.2 mm m (dry layer thickness = wet layer thickness)
<b>Theoretical consumption</b>	0.47 – 1.89 kg/m <sup>2</sup> (0.3 – 1.2 l/m <sup>2</sup> )

The actual consumption depends on the applied layer thickness and the type and state of the surface.

### 3 Mixture ratios / Application techniques / Hardener

Product	Art.-No.:	Technique	Hardener type
<b>2-C SWARCOPLAST KSP 230 HighLine</b> reactive component = base component summer formulation winter formulation	5184R 5184RW	Shielded mixture procedure, Marking machine for system 98:2	Liquid hardener
<b>Mixture ratio:</b> reactive component (KSP 230 HighLine) : liquid hardener = 98 : 2			
<b>3-C SWARCOPLAST KSP 230 HighLine</b> reactive component = base component non-reactive component*	5184R 5184NR	Shielded mixture procedure, 3-comp. special marking machines	Hardener powder
<b>Mixture ratio :</b> non-reactive component* + Hardener powder (BPO) : reactive component = 1 : 1 (2% - 4%)			
<b>3-C SWARCOPLAST KSP 230 HighLine</b> reactive component = base component non-reactive component*	5184R 5184NR	Shielded mixture procedure, 3-comp. special marking machines	Liquid hardener
<b>Mixture ratio :</b> non-reactive component* + Liquid hardener : reactive component = 1 : 1 (2% - 4%)			

\* non-reactive component, mixed with hardener gets a limited storage stability / pot life. Remaining quantity has to be as removed out of the machine after finishing marking job.  
Between October and April SWARCOPLAST KSP 230 HighLine are delivered in winter formulation, due to weather conditions

## 4 Processing Instructions

### 4.1 Preparation of material and application techniques

SWARCOPLAST KSP 230 HighLine has to be homogeneously stirred in the original container. Use just the quantity needed for the next marking job. Then the wanted hardener type is added under homogeneous stirring.

It is important for 2-component marking machines with shielded mixture procedure (98:2 system) to ensure the machine is adjusted with the correct mixture ratio inside the mixing tube. Even with only short standstill times of the machine it is necessary to rinse the mixing and spray devices with **special cleaner for marking machines** (Art.-No.: 3086).

For **3-comp. marking machines** (mixture ratio 1:1) is additionally to consider:

- When preparing the non-reactive component hardener are added under homogenous stirring and then filled into the dedicated reservoir for non-reactive component. Then the reservoir must be sealed.
- Extremely clean working conditions are essential when processing the components. Smallest contaminations / intermixing of the components can lead to premature curing. Therefore, it is advisable to use different stirring devices and auxiliaries for different components.
- Even with only short standstill times of the machine it is necessary to rinse the mixing and spray devices with special cleaner for marking machines (Art.-No.: 3086).
- Non-reactive component has a limited storage stability / potlife when mixed with hardener. Therefore, it is necessary to remove residuals of the non-applied, premixed material from the machine. Otherwise, machine damage may occur as a result of polymerization.

Cold spray plastic (reactive systems) are solvent-free and must be applied without adding solvent (optimizing of material processability, point 4.2).

The cleaning must occur before the complete curing of the material takes place by using **special cleaner for marking machines** (Art.-No.: 3086).

[www.swarco.com/rms](http://www.swarco.com/rms)

SWARCO LIMBURGER LACKFABRIK GmbH, Robert-Bosch-Straße 17, D-65582 Diez, Germany

T. +49-6432-9184-0, E. [info.limburgerlackfabrik@swarco.com](mailto:info.limburgerlackfabrik@swarco.com)

Managing Director: Mario Nöllge

The exact machine adjustments have to be done according to the manufacturer` instructions. Layer thickness and quantity of drop-on material need to be evenly distributed. Scattering losses on both line sides make modified machine adjustments necessary.

Theoretical consumption of paint and drop-on material is listed:

- in the respective test reports by BAST
- in the table 1 “RPA – test reports by BAST” see point 7.1
- in the table “Theoretical consumption of material and drop-on materials” on our website in kg/m<sup>2</sup> as well as in kg/km of line to be marked depending on typical line width

## 4.2 Optimizing of application properties of cold spray plastic

### 4.2.1 General Information

The application properties and reactivity of the material depends on temperatures of cold spray plastic, air- and surface. Proper storage conditions improve application conditions partly.

In a limited context, the viscosity and reactivity / curing time of cold spray plastics can be adapted to the specific local processing conditions.

**Attention:** use methods described with 4.2.2 and 4.2.3 regarding agent quantities. When exceeding the mentioned quantities and simultaneous usage of two or more methods (agents) grave consequence of application properties or traffic technological properties will occur.

### 4.2.2 Viscosity

**Increase of viscosity** (e. g. high material- air- and surface temperatures): addition of max. 0.2% thixotropic agent (Art.-No.: RH13700 solid or RH10459 liquid).

**Reduction of viscosity** (e. g. low material- air- and surface temperatures) addition of max. 1% condenser (Art.-No.: 3044).

**Attention:** Add the needed agent quantity to the required amount of material for application only, otherwise viscosity or settle properties can change.

### 4.2.3 Reactivity / curing time

**Acceleration of reactivity / curing time** (e. g. spring/autumn application jobs with low temperatures)

- a) addition of max. 0.2% accelerator for cold spray plastic (Art.-No.: 8060) or
- b) increase hardener quantity up to max. 2% by weight percentage

**Retarding of reactivity / curing time** (e. g. high temperatures in the summertime)

- a) add max. 0.2% retarder (Art.-No.: 8050) or
- b) reduce hardener quantity but not below 0.5% by weight percentage

**Attention:** for ensuring proper chemical reaction don` t come under 0.5% by weight percentage and don` t exceed 2% by weight percentage for hardener.

Different potlife- and curing times depend on material- and surface temperatures, different hardener quantities, adding accelerator or retarder is shown in the spreadsheet.

**Table 1: Curing times of 2-Comp. cold spray plastic system 98:2 with liquid hardener in relation to material and surface temperatures**

Temp. (°C)	hardener quantity liquid (weight %)	Hardener time (min)
0°	2	23
5°	2	15
10°	2	13
15°	2	10
20°	2	9
25°	2	7
30°	2	5
40°	2	4
45°	2	3

**Table 2: Curing times of 3-component cold spray plastic depending on material and road surface temperatures.**

Temp. (°C)	Hardener quantity liquid / solid (weight %)*	Hardener time (min)
0°	4	35
5°	4	30
10°	4	15
15°	4	10
20°	2	6
25°	2	5
30°	2	5
30°	1	8
40°	1	5
45°	1	5

**Table 3: Curing times of 3-component cold spray plastic depending on temperature while adding accelerator or retarder.**

Temp. (°C)	Hardener quantity liquid / solid (weight %)*	Accelerator (weight%)	Retarder (weight%)	Hardener time (min)
0°	2	0,2	-	27
5°	2	0,2	-	22
10°	2	0,2	-	7
15°	2	0,1	-	6
20°	2	-	-	6
25°	2	-	0,1	7
30°	2	-	0,1	6
30°	2	-	0,2	5
40°	2	-	0,2	7
45°	2	-	0,2	7

\* non-reactive comp. A

## 5 Road surface / pretreatment

### 5.1 General Information

The surface must be dry, clean and free from grease, oil and loose gravel and other contaminations. The surface and potential existing old markings must be checked for their carrying capacity and compatibility with the material to be applied. In case of doubt, test applications and adhesion tests are required. Ideally, old markings should be removed with appropriate mechanical procedures.

**Information:** SWARCOPLAST KSP 230 HighLine is not appropriate for large surface applications (e. g. playground, sportsground, cycle path or similar).

### 5.2 Concrete or cement-bound surfaces

The pavement components in new road surfaces that prevent good bonding (fine mortar layer, concrete slurries) must be appropriately removed (e. g. with high pressure waterjet, fine millcut or similar). New washed concrete pavements (with chip seal surface) can still cause adhesion problems that are not due to the marking material / primer. We recommend conducting test applications.

Before applying SWARCOPLAST KSP 230 HighLine on concrete or cement-bound surfaces should be pretreated with primers,

- a) by spray technique (paint spray machine) with 2-C EP-primer (Art.-No.: 8609000) or
- b) manual (roller) with 2-C primer B71 for concrete (Art.-No.: 8010)

It is essential to have a sufficient and uniform coverage with primer in order to obtain an optimum bonding of the cold spray plastic and the concrete. Primer consumption may vary

[www.swarco.com/rms](http://www.swarco.com/rms)

SWARCO LIMBURGER LACKFABRIK GmbH, Robert-Bosch-Straße 17, D-65582 Diez, Germany

T. +49-6432-9184-0, E. [info.limburgerlackfabrik@swarco.com](mailto:info.limburgerlackfabrik@swarco.com)

Managing Director: Mario Nöllge

depending on the concrete's porosity. The moisture of concrete must not exceed 4% during when applying 2-C primer B71 for concrete. Primers based on epoxy resins are suitable for residual moisture surfaces.

Primers diminish formation of bubbles that are likely to occur when concrete surfaces are not primed.

### 5.3 Bituminous surfaces

Any loose components such as chippings must be removed.

### 5.4 Cobbled pavement

All kind of cobbled pavements are moveable surfaces. That can lead to crack formation or spallings on the marking. Material is used without any manufacture guarantee. Test applications, surface pretreatments are recommended. Cobbled pavement must ensure proper bonding.

#### **Compound concrete stone pavements:**

Pavement is to be primed by 2-component primer B71 for concrete (Art.-No.: 8010), see Technical Information). Afterwards cold spray plastic can be applied.

#### **Natural or cast stone pavements (basalt, granite...):**

Marking surface must be primed with 2-C primer B55 for cobbles (Art.-No.: 8011).

Afterwards apply cobblestone mortar (Art.-No.: 5232...) and pay attention to get an even and flat surface. The overall dimensions should protrude 2 – 3 cm over the marking surface. After curing cold plastic application follows. Consumption of primer and pavement mortar depends on shape of paving.

### 5.5 Floor coatings

For markings on floor coatings our "SWARCO SAFETY-LINE" products should be used.

## 6 Application techniques

Application with 2-component or 3-component marking machines. Airless machines need airless products.

The quality of cured cold spray plastic is independent of chosen application technique and shows no differences. Powder or liquid hardener is chemically equivalent.

Following application techniques are used:

#### **1. 2-component marking machine, 98 : 2 technique**

Reactive component and the liquid hardener are stirred up inside the mixing tube and applied by airless – or air spray technique. The drop-on material is eventually broadcasted with the wanted quantity into the fresh layer.

#### **2. 3-component marking machine, 1 : 1 technique**

Non-reactive component (mixed with 2-4% liquid or powder hardener) and the reactive component are conveyed from separate containers with mixture ratio 1 :1, then constantly mixed in a mixing tube and finally airless applied. The drop-on material is eventually broadcasted with the wanted quantity into the fresh layer.

## 7 Test reports / Field test reports

### 7.1 Table 1: RPA – test reports by BAST (German Road Institute)

Test-report-no.	Layer thickness	consumption**		Drop-on material (DOM)	Traffic technological properties	
		Material	DOM		Identification (divergent identification possible – see relevant test report)	New condition
mm	kg/m <sup>2</sup>	kg/m <sup>2</sup>				
<b>Type I markings</b>						
2024 1DY 11.09	0.6	0.948	0.50	SWARCO SOLIDPLUS 100 425-1180 T18 MK30	P6, S1, R5, RW6, Q5, T2	P6, S1, R5, RW5, Q5
<b>Type II markings</b>						
2024 1DY 11.10	0.6	0.948	0.50	SWARCO SOLIDPLUS NEXT 100	P6, S1, R5, RW6, Q5, T2	P6, S1, R5, RW4, Q5
2025 1DY 07.10	0.6	0.948	0,5	SWARCO SOLIDPLUS NEXT 100 425-1180 T18 MK30	P7, S1, R5, RW6, Q5, T2*	P7, S1, R5, RW6, Q5

\*The drying time shown is a laboratory value and may vary depending on climatic conditions.

\*\*Actual material consumption depends on the application technique, machine settings, and the resulting actual layer thickness applied, as well as any NSM sprinkled on afterward.

The basis for classifying the marking systems according to their traffic-related properties in new or used condition was the table "Measured values" in the appendix "Results for BAST test number ..." of the respective BAST test certificate.