

CERTIFIED DETECTOR CD9234

VEHICLE CLASSIFICATION AND SPEED MEASUREMENT



SWARCO TRAFFIC SYSTEMS GMBH is a member of the internationally active SWARCO group, the one-stop shop for road markings, signage, signalisation and traffic management – your reliable partner for traffic solutions.

The CD9234 loop detector was specifically designed for vehicle detection with classification and speed measurement for traffic data acquisition and traffic management. The detector is certified by the German federal highway research institute (BASt) for TLS-loops type 1 and type 2 with a feed cable length of 300 m in all classes without double wiring.


FEATURES:

- Certified for TLS-loops type 1 and type 2 (optionally)
- Acquisition of traffic data in accordance with TLS¹/BASt² for two lanes with speed and length measurement, detection of direction and wrong way drivers with double loop systems, occupancy rate in connection with a controller
- For feed cable lengths up to 300 m is only one pair of wires per loop necessary
- Serial data transfer via interface
- 4 Open collector switching outputs for detection signals or optional functions
- Switching signals depending on vehicle class and/or vehicle speed for the direct control of a VMS with parameterizable blinking frequency and number of light impulses (special version)
- Maintenance-free
- Low power consumption
- Highly-reliable data acquisition, absolutely independent of climatic conditions and insensitive to interferences
- Automatic alignment, regulation of temperature fluctuations and non-volatile storage of all operating data
- Easy and space-saving integration due to Euro-card format for 19" rack (selectable width: 20 or 40 mm)

BASt-certified

¹ TLS: Technical delivery terms for roadway stations

² BASt: German federal highway research institute

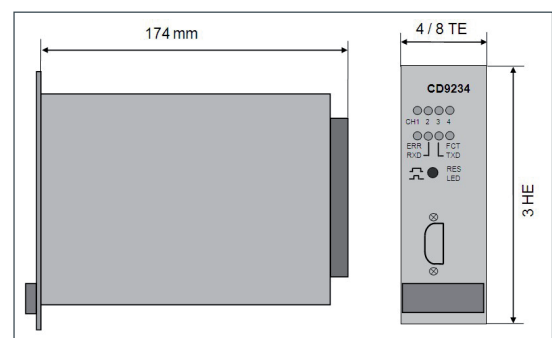

Dimensions

SWARCO | First in Traffic Solutions.

CERTIFIED DETECTOR CD9234

FUNCTIONAL DESCRIPTION:

The CD9234 is a classification detector, operating with two induction loops per lane, in accordance with TLS specification. Based on the proven and tested MC2024 / CD9054 the usages of powerful 32-Bit controllers allow the improvement of all features such as classification accuracy, power consumption, as well as the function range.

The CD9234 classifies the vehicles in (8+1), (5+1) or 2 classes acc. to TLS. When TLS loops are used, the classification meets the accuracies required by the German federal highway research institute and is not influenced by e.g. weather conditions. On activation of the directional logic, reports of wrong way drivers can be generated. The vehicle type is determined by means of passing-curves which have characteristic features depending on the different classes and the loop types used. The detector can provide the following single-vehicle data via the RS485 interface, depending on the TLS classification version:

Single vehicle data:	vehicle class, speed, length, distance, time of occupancy, time gap, driving direction
2 classes acc. to TLS:	car-similar vehicles (other vehicles, motorbike, car, van) / HGV-similar vehicles (car with trailer, HGV, HGV with trailer, HGV articulated, bus)
(5+1) classes acc. to TLS:	other vehicles / car group (motorbike, car, van) / car with trailer / HGV / HGV combination / bus
(8+1) classes acc. to TLS:	other vehicles / motorbike / car / van / car with trailer / HGV / HGV with trailer / HGV articulated / bus

Via the RS485 bus single-vehicle data is transferred to a controller, which takes over further data aggregation acc. to TLS-specifications. The detector automatically adjusts itself to the attached loop/feed-cable combination. Variations in temperature have no influence on data acquisition. The measuring systems are permanently checked for short or open loops, only when a definite malfunction is detected, systems are put into a failure condition. If one loop of a TLS double-loop system is disturbed, the remaining loop supplies further data on time of occupancy, time gap and a classification of car-similar and HGV-similar vehicles. Speeds and vehicle lengths cannot be determined. Short measuring intervals and a new procedure for speed measurement provide for the high accuracy of the measured data and the high detection speed, according to the requirements of the German federal highway research institute.

The test pattern certified by the Federal Highway Research Institute consists of the detector CD9234 and an STS-FG1-IOC for the data aggregation and connection to the Federal Highway Research Institute testing system.

TECHNICAL DATA:

Supply voltage	5 V DC +/-5 % (regulated and load-independent)
Power consumption	max. 90 mA / 0.45 W (5 V DC, standard switching output Open Collector)
Interfaces	RS485 data interface (plug connector), RS232 service interface (on front)
Switching outputs	switching output per channel: Open Collector, common error output: Open Collector optional: electronic relay contact
Dimensions	height: 128 mm, length: 190 mm, width: 20 mm (4 TE), optional 40 mm (8 TE),
Operating / storage temperature	-25°C to +80°C / -40°C to +80°C
Protection	III (low voltage < 60 V DC)
Design	plug-in card for 19" rack, to be installed in housing or cabinet with IP54 necessary (pollution degree 2)
Terminal strip	DIN 41612, type F: 48-pole strip, 3-row

For detailed information about the function, operation and pin assignment as well as further technical data see user manual.

YOUR LOCAL CONTACT | SALES



SWARCO TRAFFIC SYSTEMS GMBH

SWARCO TRAFFIC SYSTEMS GMBH is one of the leading suppliers of intelligent traffic systems in Germany. Building on many decades of experience, it offers a wide range of innovative solutions for urban and interurban traffic management, including parking and traffic detection. Its nationwide service and maintenance network guarantees highest possible system availability and improved road safety. With economical, sustainable, and environmentally friendly technologies we help ensure smooth and safe traffic flows.



SWARCO TRAFFIC SYSTEMS GMBH

Niederkircher Straße 16, D-54294 Trier, Germany, T. +49-651-81002-0, F. +49-651-81002-979,
E. detection@swarco.de, www.swarco.com